


HiCover




HiCover is designed to beat the common COB flood lights and traditional HID flood lights.

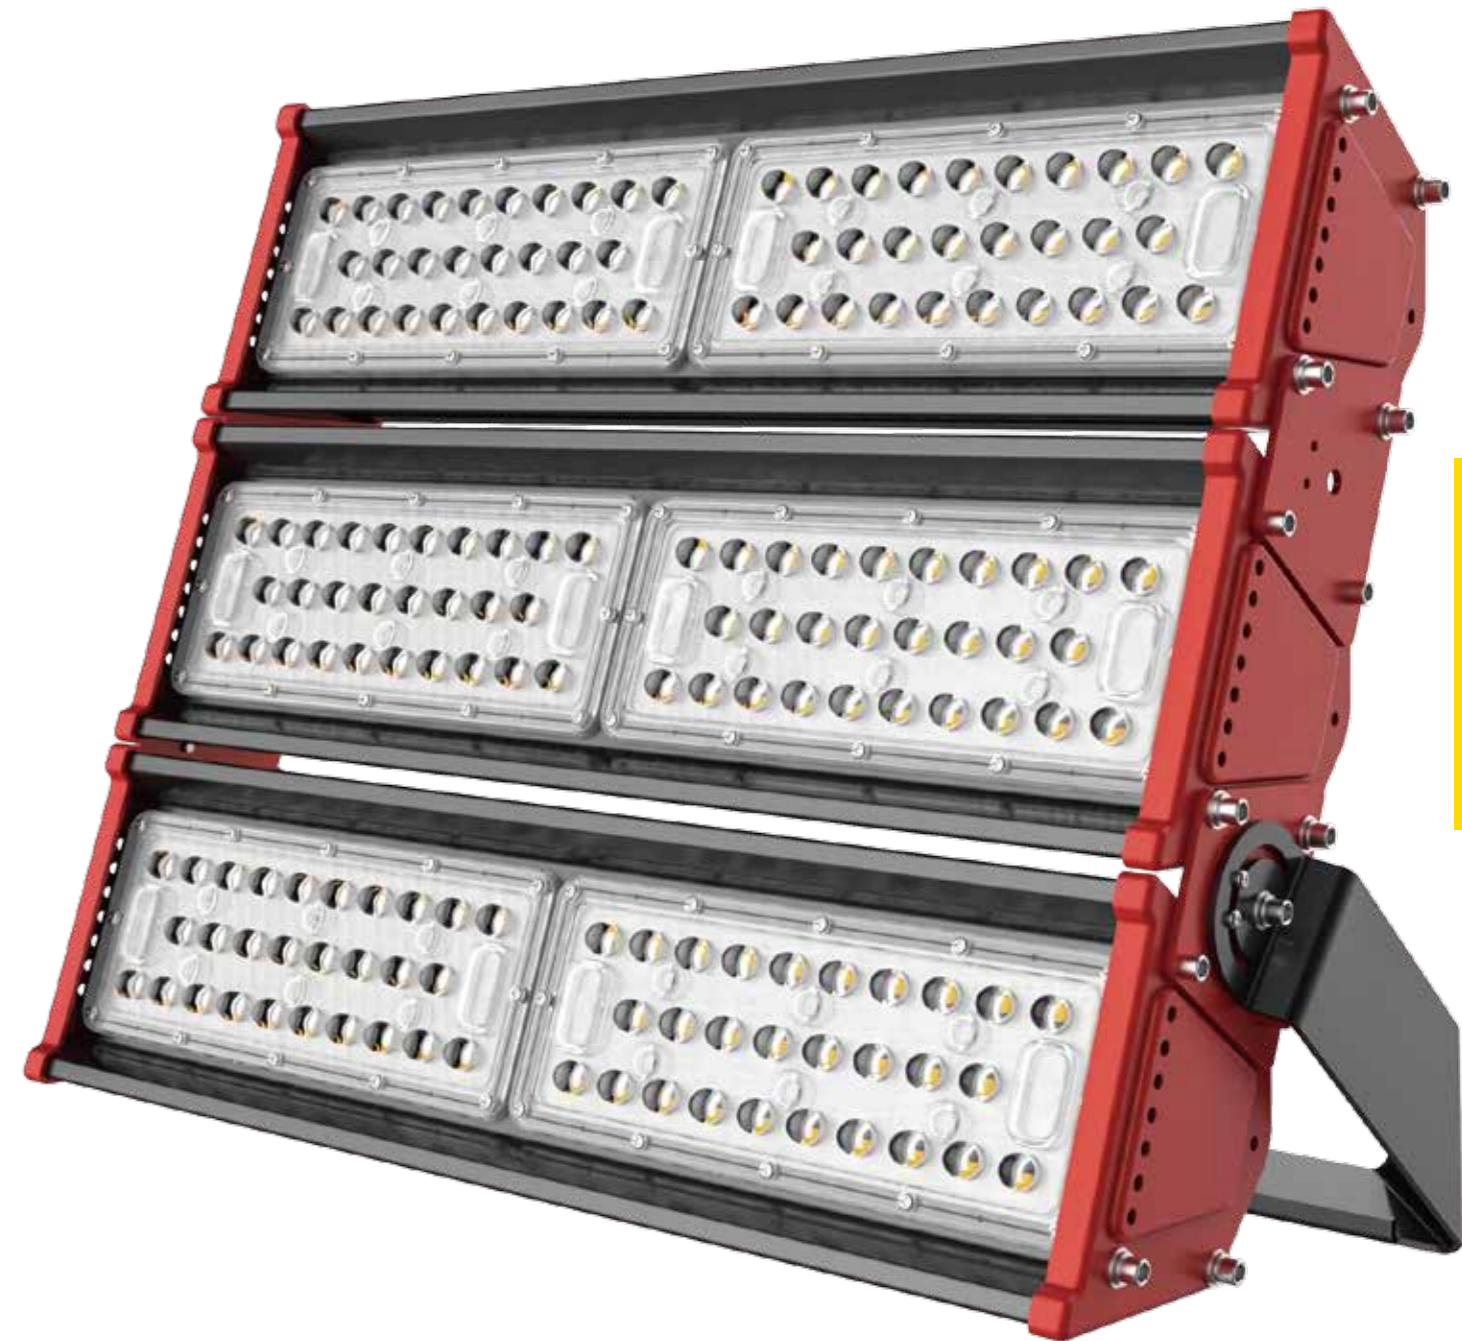

Modular design

30W for each module, 60W to 240W available by different combination.
The red and black colors make it special and different from others.

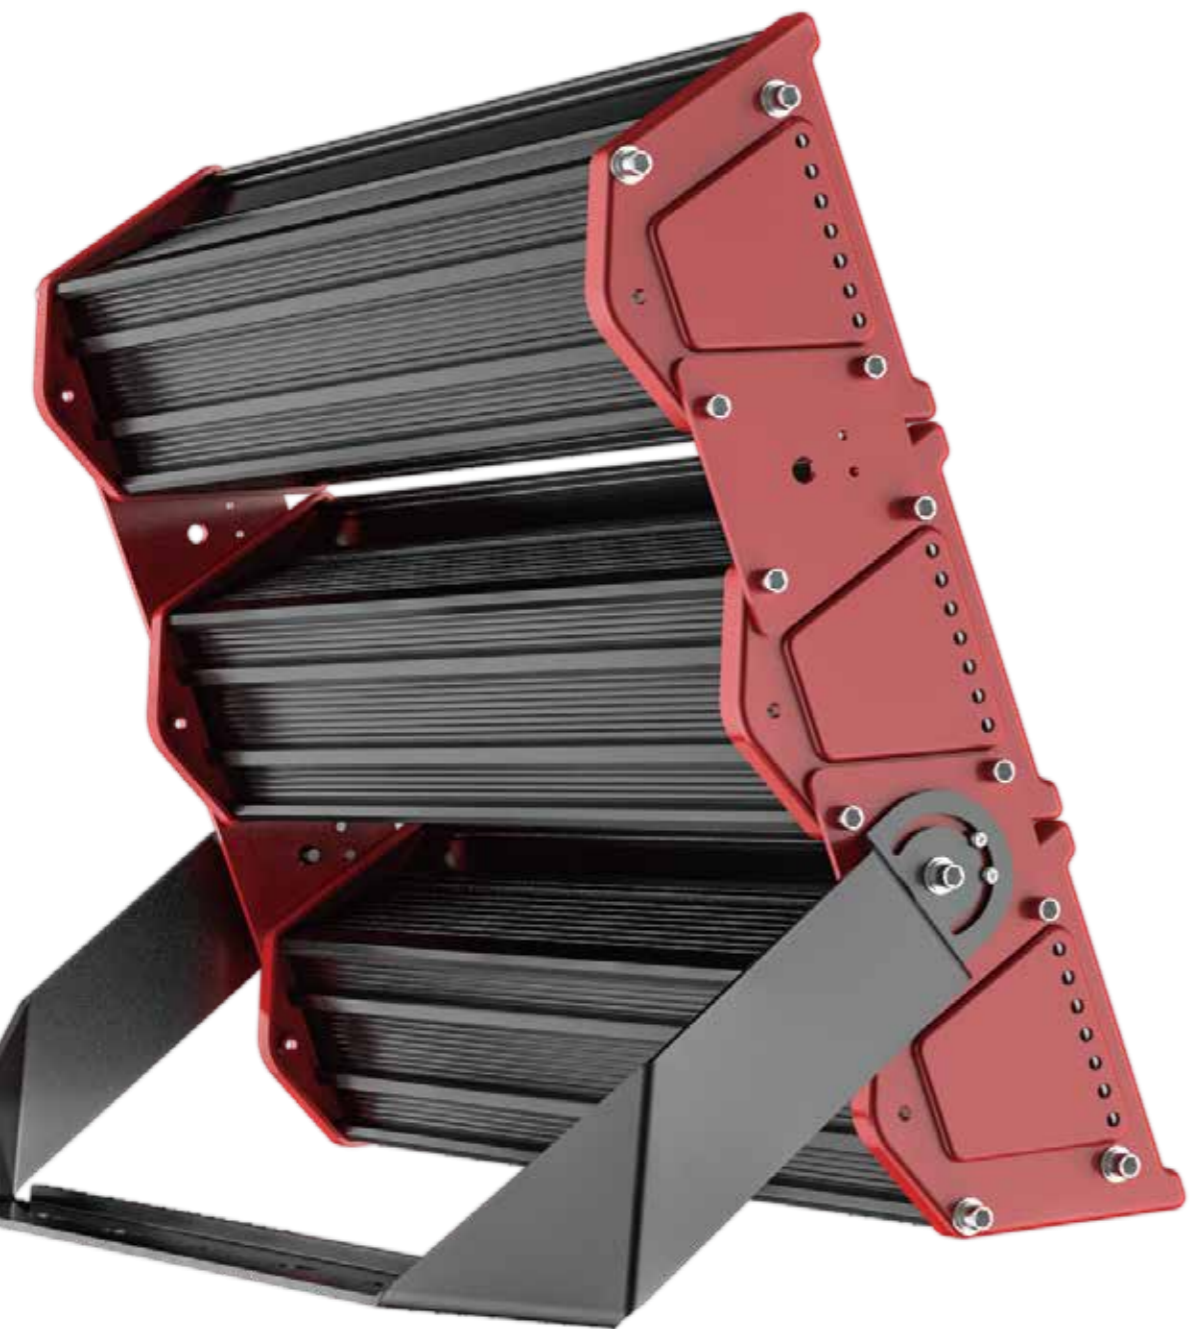

Wide Applications

Stadium
Indoor Plazas
Large docking area



Multiple Options of Optics



HiCover has various beam angles which are suitable for all kinds of applications at different installation height. The PC lens has excellent quality and high transmittance for any possible harsh environments.

Controls and Dimming

- ▶ DALI Control
- ▶ Motion Sensor
- ▶ Daylight Sensor Control
- ▶ PIR Sensor

Certification



Technical Data

Part Number	FL01-60	FL01-90	FL01-120	FL01-180	FL01-240
Lumen Output	7,800lm	12,150lm	16,200lm	24,300lm	32,400lm
Wattage	60W	90W	120W	180W	240W
Luminous Efficacy	130lm/W	135lm/W			
CCT	5000K(3000K,4000K optional)				
CRI	> Ra70(> Ra80 optional)				
IP Rating	IP65				
Working Temperature	-30°C to +50°C				
LED Driver	MEANWELL				
Input Voltage	100-240Vac/100-277Vac/277-480Vac, 50-60Hz				
Power Factor	≥0.92				
Warranty	5 years				
Lifespan	> 50,000hrs				
HID Equivalent	150W	250W	250W	400W	600W

Light Distribution

