



HiRack LED Linear High Bay

Model No.	LHB01-090	LHB01-120	LHB01-150	LHB01-180	
Power Consumption	90W	120W	150W	180W	
LED Type	Nichia LED				
Luminous Flux	12150(±5%)LM	16200(±5%)LM	20250(±5%)LM	24300(±5%)LM	
Efficacy	135LM/W (CRI 70), 125LM/W (CRI 80), standard				
Luminous Flux	148550(±5%)LM	19800(±5%)LM	24750(±5%)LM	29700(±5%)LM	
Efficacy	165LM/W (CRI 70), 150 LM/W (CRI 80), High efficacy				
Correlated Color Temperature	5000K (3000K, 4000K optional)				
Color Rendering Index	Ra70 (Ra80 optional)				
Beam Angle	L02801, L02802, L02803, L02804, L02805, L06401, L06402, L06403, L06404				
Power Supply	Meanwell				
Input Voltage	100-277VAC , 277-480 VAC				
Power Factor	≥0.93				
Frequency	50 / 60 Hz				
Surge Protection	2kV line-line, 4kV line-earth				
Driver Type	Constant Current (CC)				
Product Dimension	718×137×102mm (28.27"×5.39"×4.02")	948×137×102mm (37.32"×5.39"×4.02")	1178×137×102mm (46.38"×5.39"×4.02")	718×275×102mm (28.27"×10.83"× 4.02")	
Luminaire Net Weight	4.7±0.3kg (10.36±0.66Lbs)	5.7±0.3kg (12.57±0.66Lbs)	6.9±0.3kg (15.21±0.66Lbs)	8.5±0.3kg (18.74±0.66Lbs)	
Export Carton Size	1250×200×160mm (49.21"×7.87"×6.3")	1250×200×160mm (49.21"×7.87"×6.3")	1250×200×160mm (49.21"×7.87"×6.3")	790×338×160mm (31.1"×13.31"×6.3")	
Gross Weight	5.3±0.3kg (11.68±0.66Lbs)	6.5±0.3kg (14.33±0.66Lbs)	8.0±0.3kg (17.64±0.66Lbs)	9.8±0.3kg (21.61±0.66Lbs)	
Material	Housing Optics	Aluminum Alloy PC Lens			
Finish	Electrophoresis				
Fixture Color	Black/White/Black Body&Red Front				
IP Rating	IP65				
Mounting Option	Suspension mounting / Ceiling mounting				
Operating Temperature	-22°F to +122°F (-30°C to +50°C)				
Life Time	>50,000Hrs (Ta=30°C@L70)				
Dimmable	1-10V Dimmable and Non-dimmable				
Intelligent Control	ZigBee Control Microwave sensor / PIR sensor				
Accessory	PC Optics Lens Bracket : U bracket Mounting/ Pole Mounting Bracket				

Dimensions

Photometry

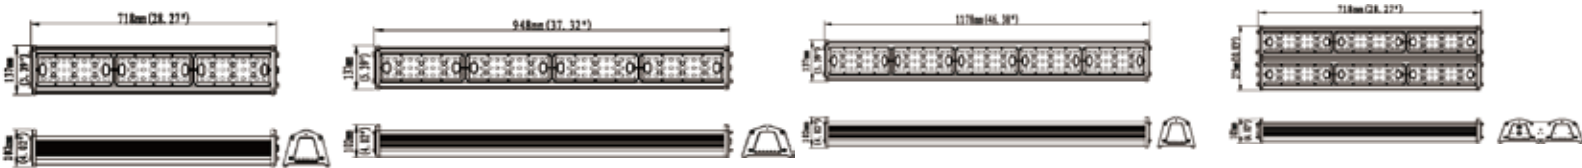

Description

- AGC's HiRack LED linear high bay is the perfect lighting for aisle in
- Warehouse. Rectangular long and narrow lighting pattern
- Perfectly complied with aisles, can effectively reduce light loss
- And providing an intelligent high bay solution.

Key Features

- High lumen output 135lm/w and 165lm/w
- Intelligent controls for energy saving
- Wide choice of optics to suit more applications
- Optional wattages with different length


Applications

- Warehouse
- Industrial Facility
- Shopping Mall
- Toll Station and etc
- Sport ground
- Stadium
- Parking lot

Accessories



Photometry

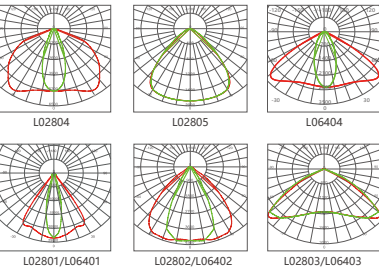

LHB01-090

LHB01-120

LHB01-150

LHB01-180